

Portable Oil Change OP-7-P

The OP-7-P is a portable oil change system mounted to an easy-carry base. The pump is ideal for completing oil changes on generators and boat engines. Drain and fill oil; then connect the hoses back to the base to keep clean.


Basic Features

- IP67 rated
- 3 ft and 5 ft hose
- Reversing switch
- Battery clips
- Available in 12V and 24V
- Adapter (1/4" Female NPT) connects to oil pans*



*Compatible with some inboard engines that have an oil pan hose with 1/4" Female NPT connection.

The hoses connect back to base when not in use.

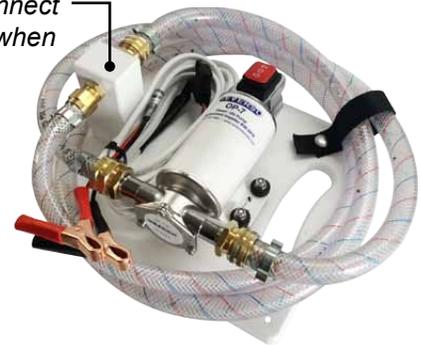

Pump and Spare Parts

33-2302-01-1-2	12 Volt
33-2302-02-1-2	24 Volt
33-2279	Wand Set
38-2410	Viton Impeller
38-2420	SRK-380 Repair Kit:
	(1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover
38-2420-02	SRK-380-2 Repair Kit:
	(2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearing (2) Seal (2) Seal cover
38-2421	SRK-381 Rebuild Kit for 12V:
	(1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover (1) Brush holder with integrated 12V switch
38-2421-02	SRK-381-2 Rebuild Kit for 12V:
	(2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearings (2) Seal (2) Seal cover (2) Brush holder with integrated 12V switch
38-2422	SRK-382 Rebuild Kit for 24V:
	(1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover (1) Brush holder with integrated 24V switch
38-2422-02	SRK-382-2 Rebuild Kit for 24V:
	(2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearings (2) Seal (2) Seal cover (2) Brush holder with integrated 24V switch

Technical Specifications

Flow Rate	7.4 GPM / 28 LPM	
Hose to Engine	5/8" I.D. - 5 ft with 3/4" Female Garden Hose (connects to dipstick tube)	
Hose to Container	1/2" I.D. - 3 ft	
Voltage	12V or 24V	
Amp. Draw	8A / 12V, 4A / 24V	
Fuse	10A / 12V, 7.5A / 24V	
Min. Ambient Temperature	14°F / -10°C	
Min. Ambient Temperature	140°F / 60°C	
Impeller	Viton	
Rated	IP67	
Dimensions	A	9.56" / 243 mm
	B	10.75" / 273 mm
	C	4.5" / 114 mm
	10 lbs / 4.5 kg	

Version 11/11/16