

# Gear Pump 602

The GP-602 is a self-priming, electric, gear pump for discontinuous or intermittent use. Transfers diesel or water. Contains bronze gears which can run for brief, dry periods.

## Basic Features

- Self-priming
- Reversible flow
- 12V or 24V
- IP67 rated

## Compatible Fluids


- Diesel (minimum flash point 131°F / 55°C)
- Fresh water (max 185°F / 85°C)



## Technical Specifications

<b>Flow Rate</b> (1/2" I.D. hose)	6.9 GPM 26 LPM	
<b>Voltage</b>	12 and 24V	
<b>Ports</b>	1/2" Male NPT	
<b>Pressure</b>	29 psi / 2 bar	
<b>Ambient Temperature</b>	Min. 14°F / -10°C Max. 140°F / 60°C	
<b>Amp. Draw</b>	10A / 12V 5A / 24V	
<b>Fuse</b>	15A / 12V 7.5A / 24V	
<b>Pump Type</b>	Gear	
<b>Body</b>	Nickel-plated brass	
<b>Shaft</b>	Stainless steel	
<b>Self-Priming</b>	4.9 ft / 1.5 m (wet gears)	
<b>Compatible Fluids</b>	Diesel (minimum flash point 131°F / 55°C)  Fresh water (max 185°F / 85°C)	
<b>Dimensions</b> <b>GP-602</b>	A	7 1/8" / 182 mm
	B	4 5/8" / 117 mm
	C	4 1/4" / 108 mm
<b>Weight</b>	6.8 lbs / 3.1 kg	

## Flow Rate

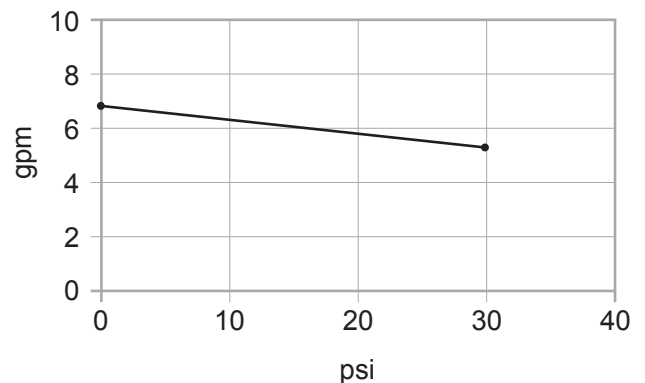

## Amperage

