


- Ideal for high viscous fluids like oil
- Ideal for longer run time
- Compact and durable
- Positive displacement
- Self-priming
- IP-65 rated
- Customizable to suit a variety of applications
- Available in 12V and 24V
- Integrated bypass
- Available with preset pressure settings (10, 15, 22, 35 psi)

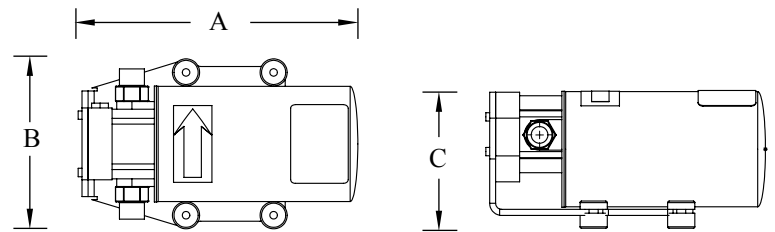


Technical Specification

| | |
|-------------------|--|
| Ports | 3/8" Male NPT |
| Max work pressure | 50 psi (3.5 bar) |
| Max work temp. | 140 °F (60 °C) |
| Flow Rate | 2.6 GPM (10 LPM) |
| Self-priming | 5 ft (1.5 m) (wet gears) |
| Pump body | Brass |
| Gears | Helical Bronze |
| Shaft | Stainless steel |
| Seal | Fluoroelastomer lip seal |
| Motor | 12V or 24V DC Meets IP-65 specifications - waterproof |
| Breaker | 10A@12V, 5A@24V |
| Maximum Draw | 8A@12V, 4.5A@24V |

| Part Number | Description |
|-------------|-------------|
| GP-312B-12 | 12 Volt |
| GP-312B-24 | 24 Volt |

| Model | A | B | C | Weight |
|---------|------------------|------------------|------------------|--------|
| GP-312B | 7.2" (182 mm) | 4.4" (113 mm) | 3.56" (90 mm) | N/A |

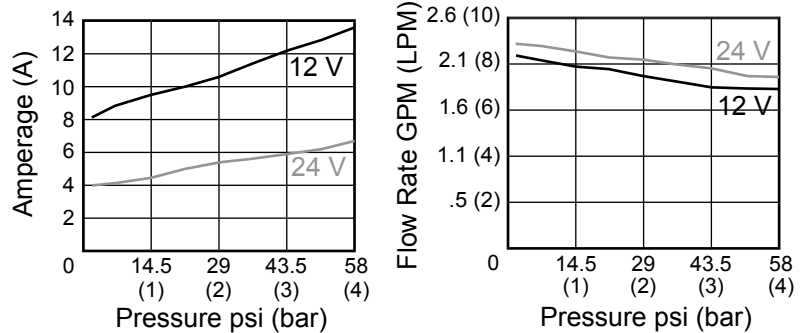

Drawing dimensions for reference only
Technical drawings available upon request.

Shown: GP-312B-24