
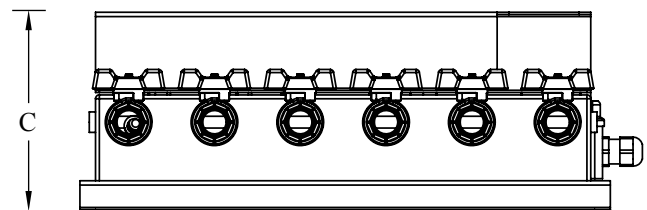


AC Oil Change System with Gear Pump

Reverso has been the premier maker of oil change systems for over 20 years. This product is installed as standard equipment by the majority of boat builders.

- Industrial strength
- Multiple power options
- Ideal for larger vessels
- Stainless cover and base
- Control box contains breaker
- Reversible (Drains and fills engines)
- Self-priming
- Compact
- Simplifies oil changes
- Reduces chances of oil spills
- Available with valve options 3 - 7

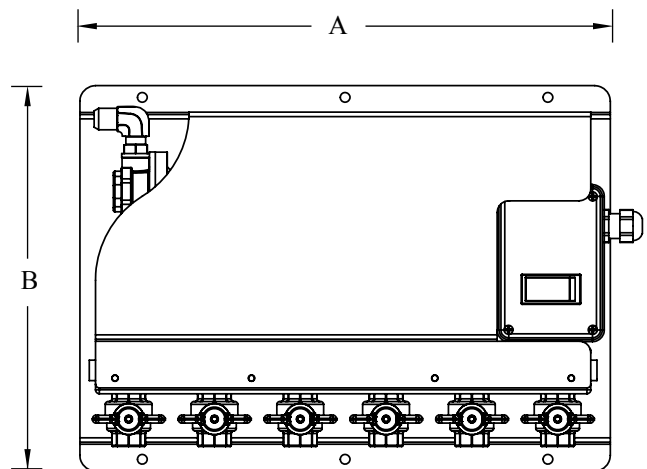

Drawing dimensions for reference only.
 Technical drawings available upon request. Shown: GP-806-20-05

Technical Specification

Pump Ports	1/2" Flare
Manifold Ports	1/2" FNPT
Breaker	5A@110V
Volt	110V@60 Hz, 220V@50 Hz
Flow Rate	3.5 GPM (13.25 LPM)
Lift	30 ft (9.14 m) (water) (wet gears)
Pump body	Brass
Gears	Bronze
Shaft	Stainless Steel
Seal	Fluoroelastomer lip seal
Motor	AC TEFC (Totally Enclosed Fan Cooled)

Model	A	B	C	Weight
GP-805	17"(432mm)	12.4"(315mm)	6.3"(160mm)	30 lbs(13.6kg)
GP-806	17"(432mm)	12.4"(315mm)	6.3"(160mm)	30 lbs(13.6kg)

Part Number	Valves	Description
GP-805-10-06	5	110 Volt, 60 Cycle Motor
GP-805-20-05	5	220 Volt, 50 Cycle Motor
GP-805-20-06	5	220 Volt, 60 Cycle Motor
GP-806-10-06	6	110 Volt, 60 Cycle Motor
GP-806-20-05	6	220 Volt, 50 Cycle Motor
GP-806-20-06	6	220 Volt, 60 Cycle Motor