

Oil Change System: GP-800 Series



Fast lube oil change system drains used oil and fills new oil to multiple equipment.

Basic Features

- Self-priming
- Motor equipped with thermal protection
- Cable for electrical connection
- Drain and fill switch
- Valve options 3-7
- Available in 110V and 220V

Technical Specifications

Flow Rate	3 GPM / 12 LPM	
Voltage	120V	
Ports	3/8" Male NPT	
Max. Work Pressure	58 psi / 4 bar	
Nominal Amp. Draw	6.3A	
Max. Amp. Draw	4.5A	
Frequency	60 Hz	
RPM	3400	
Pump Type	Gear	
Body	Bronze	
Gears	Bronze	
Shaft	Stainless steel	
Seal	Fluoroelastomer lip seal	
Self-Priming	6 ft / 2 m (wet gears)	
Max. Lift	15 ft / 5 m with foot valve	
Dimensions	A	12.75" / 324 mm
GP-803 (3 Valve)	B	12.75" / 324 mm
	C	6.3" / 160 mm
	A	12.75" / 324 mm
GP-804 (4 Valve)	B	12.75" / 324 mm
	C	6.3" / 160 mm
	A	16.25" / 413 mm
GP-805 (5 Valve)	B	12.75" / 324 mm
	C	6.3" / 160 mm
	A	16.25" / 413 mm
GP-806 (6 Valve)	B	12.75" / 324 mm
	C	6.3" / 160 mm
	A	19.5" / 495 mm
GP-807 (7 Valve)	B	12.75" / 324 mm
	C	6.3" / 160 mm

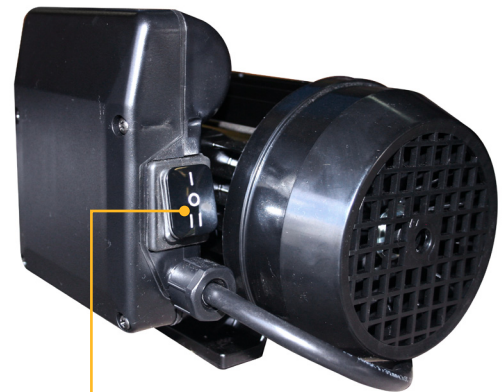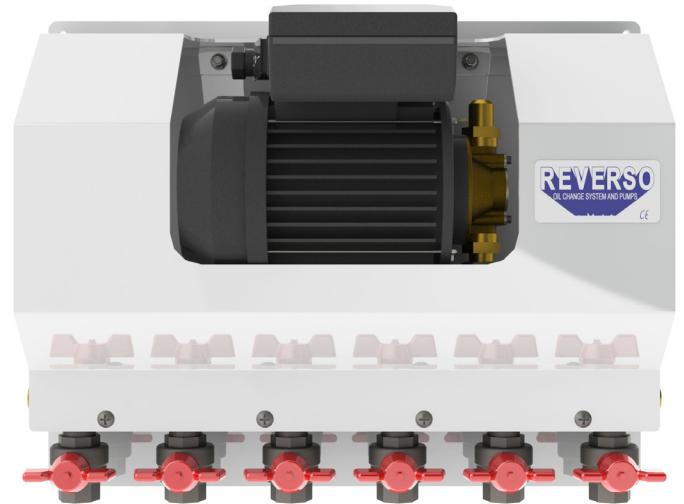

Reversing switch

