

Oil Change System with Impeller Pump

Reverso has been the premier maker of oil change systems for over 20 years. This product is installed as standard equipment by a majority of boat builders.

- Reversible (Drains and fills engines)
- Self-priming
- Chrome plated brass head
- Built-in switch guard
- Easily changed impeller
- "CE" certified
- Available with valve options 2 - 6

Technical Specification

| | |
|------------------|--------------------|
| Pump Port | 1/2" Flare |
| Manifold Ports | 1/2" FNPT |
| Amp. Draw | 7.0A@12v, 3A@24v |
| Flow Rate | 2 GPM (7.57 LPM) |
| Self priming | 3 ft (0.91 m) |
| Lift | 10 ft (3.05 m) |
| Pump body | Nickel Brass |
| Impeller | Nitrile (Standard) |
| Working Pressure | 0 to 15 psi |
| Seal | Nitrile Rubber |
| Motor | 12V or 24V DC |
| Fuse | 15A@12V, 10A@24V |

Impellers & Gaskets

| | |
|--------|---|
| 360010 | Impeller (Nitrile) use for oil or water transfer |
| 360014 | Impeller (Fluoroelastomer) use for diesel fuel transfer & diesel engine oil |
| 360120 | Gasket for OP-6 |

Repair Kit: Impeller + Gasket Set

| | |
|---------|------------------|
| SRK-360 | 1 Oil/water set |
| SRK-370 | 1 Diesel/oil set |

Rebuild Kits: Impeller + Gasket + Seals Set



| | |
|---------|------------------|
| SRK-361 | 1 Oil/water set |
| SRK-371 | 1 Diesel/oil set |

Parts

| | |
|--------|-----------------------------------|
| 360060 | Cover Plate for OP- 6 |
| 360070 | Brass Cam for OP- 6 |
| 36015 | Fuse (15 amp slow burn) |
| 360002 | Pump Head Assembly |
| 36003 | 3 - Way Toggle Switch (On-Off-On) |

Ordering Specifications

Model _____ OP 70_ 12/24
 Pump _____
 # of valves _____
 Voltage _____

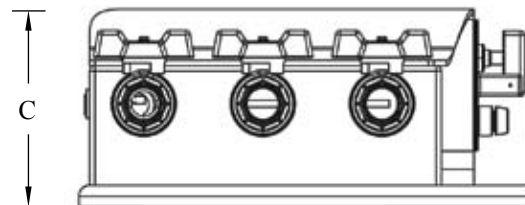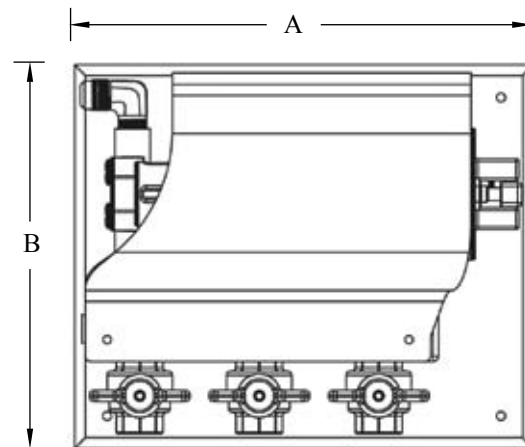

Drawing dimensions for reference only.
 Technical drawings available upon request.

Shown: OP-703-12

| Model | A | B | C | Weight |
|--------|-----------------|----------------|-----------------|----------------|
| OP-702 | 9.6" (244.5mm) | 8.8" (223.9mm) | 4.55" (115.6mm) | 10 lbs (4.5kg) |
| OP-703 | 10.6" (269.9mm) | 8.8" (223.9mm) | 4.55" (115.6mm) | 11 lbs (5.0kg) |
| OP-704 | 11.6" (295.3mm) | 8.8" (223.9mm) | 4.55" (115.6mm) | 12 lbs (5.5kg) |
| OP-705 | 14.3" (362mm) | 8.8" (223.9mm) | 4.55" (115.6mm) | 13 lbs (5.9kg) |
| OP-706 | 16.3" (418.8mm) | 8.8" (223.9mm) | 4.55" (115.6mm) | 15 lbs (6.8kg) |