

FPS-2000

The Fuel Polishing System removes water, bacterial growth, and other particulate from diesel that are detrimental to fuel systems and thereby resolving many issues related to degraded fuel.

Basic Features

- Separ Filter fuel water separator with 30 micron
- Digital timer
- Visual/audio and shutdown alarm for high vacuum, high water and spill
- 1 1/2" Full port valves (inlet and outlet side)
- Stainless steel piping
- Emergency stop button

Optional Features

- Magnetic fuel conditioner
- Flow Meter

Technical Specifications


Flow Range	1,600 GPH / 6,057 LPH	
Inlet / Outlet	1 1/2" 4-bolt flange 1 1/2" Female NPT	
Voltage	110V or 220V	
Pump	Sintered steel rotor with resin vanes	
Circuit Breaker	15A	
Suction Capability	15 ft vertical lift (1 1/2" lines)	
Dimensions	A	36" / 914 mm
	B	24" / 610 mm
	C	46" / 1,168 mm
Weight	435 lbs / 197 kg	

Replacement Elements

01810*	10 micron
01830*	30 micron
01860S*	60 micron, stainless steel
*SWK-2000/130MK filter requires 4 elements	



Shown with additional options.

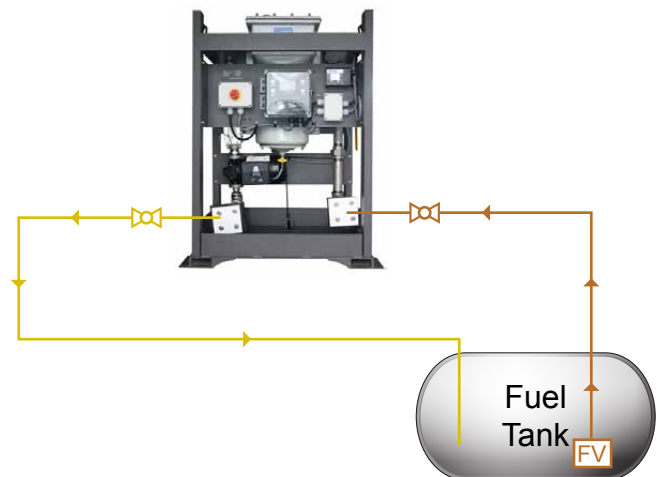

Isolation valves and foot valve not included.