

# Gear Pump 311 AC

Gear pump suitable for diesel fuel, oil, and water transfer in continuous usage.

## Basic Features

- Self-priming
- Motor equipped with thermal protection
- Cable for electrical connection
- Integrated switch
- Available in 120V


## Choose A Switch

- On/off switch
- Reversing switch

## Technical Specifications

<b>Flow Rate</b>	3 GPM / 12 LPM	
<b>Voltage</b>	120V	
<b>Ports</b>	3/8" Male NPT	
<b>Max. Work Pressure</b>	58 psi / 4 bar	
<b>Max. Amp. Draw</b>	4.5A	
<b>Frequency</b>	60 Hz	
<b>RPM</b>	3400	
<b>Pump Type</b>	Gear	
<b>Body</b>	Bronze	
<b>Gears</b>	Bronze	
<b>Shaft</b>	Stainless steel	
<b>Seal</b>	Fluoroelastomer lip seal	
<b>Self-Priming</b>	6 ft / 2 m (wet gears)	
<b>Max. Lift</b>	15 ft / 5 m with foot valve	
<b>Dimensions</b>	A	8.23" / 209 mm
	B	6.75" / 171 mm
	C	6" / 152 mm

Pressure (psi)	Flow Rate (GPM)
0	3.3
10	3.1
20	2.9
30	2.8
40	2.6
50	2.4

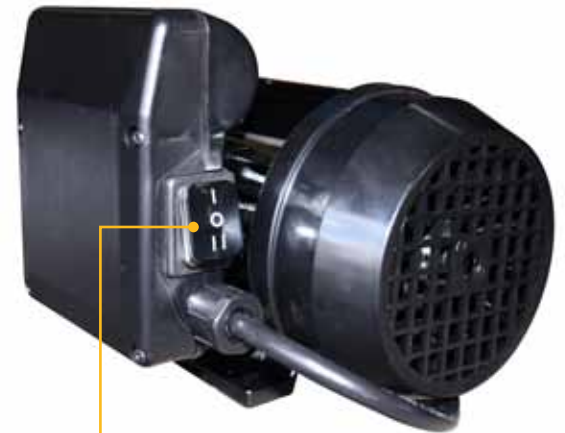

Reversing switch

