


Portable Oil Change OP-7-P

The OP-7-P is a portable oil change system mounted to an easy-carry base. The pump is ideal for completing oil changes on generators and boat engines. Drain and fill oil; then connect the hoses back to the base to keep clean.


Basic Features

- IP65 rated
- 3 ft and 5 ft hose
- Reversing switch
- Battery clips
- Available in 12V and 24V
- Adapter (1/4" Female NPT) connects to oil pans*



*Compatible with some inboard engines that have an oil pan hose with 1/4" Female NPT connection.

The hoses connect back to base when not in use.

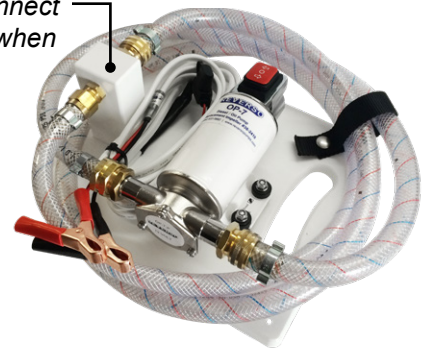

Pump and Spare Parts

| | |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 33-2302-01-1-2 | 12 Volt |
| 33-2302-02-1-2 | 24 Volt |
| 33-2279 | Wand Set |
| 38-2410 | Viton Impeller |
| 38-2420 | SRK-380 Repair Kit: |
| | (1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover |
| 38-2420-02 | SRK-380-2 Repair Kit: |
| | (2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearing (2) Seal (2) Seal cover |
| 38-2421 | SRK-381 Rebuild Kit for 12V: |
| | (1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover (1) Brush holder with integrated 12V switch |
| 38-2421-02 | SRK-381-2 Rebuild Kit for 12V: |
| | (2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearings (2) Seal (2) Seal cover (2) Brush holder with integrated 12V switch |
| 38-2422 | SRK-382 Rebuild Kit for 24V: |
| | (1) Impeller (1) Top plate (1) O-ring (3) Screws (1) Ball bearing (1) Seal (1) Seal cover (1) Brush holder with integrated 24V switch |
| 38-2422-02 | SRK-382-2 Rebuild Kit for 24V: |
| | (2) Impeller (2) Top plate (2) O-ring (6) Screws (2) Ball bearings (2) Seal (2) Seal cover (2) Brush holder with integrated 24V switch |

Technical Specifications

| | | |
|---------------------------------|---------------------------------------------------------------------------|-----------------|
| Flow Rate | 7.4 GPM / 28 LPM | |
| Hose to Engine | 5/8" I.D. - 5 ft with 3/4" Female Garden Hose (connects to dipstick tube) | |
| Hose to Container | 1/2" I.D. - 3 ft | |
| Voltage | 12V or 24V | |
| Amp. Draw | 6A / 12V, 4A / 24V | |
| Fuse | 7.5A / 12V, 5A / 24V | |
| Min. Ambient Temperature | 14°F / -10°C | |
| Min. Ambient Temperature | 140°F / 60°C | |
| Impeller | Viton | |
| Rated | IP65 | |
| Dimensions | A | 9.56" / 243 mm |
| | B | 10.75" / 273 mm |
| | C | 4.5" / 114 mm |
| | 10 lbs / 4.5 kg | |

Version 1/31/2023